

# TBOX-LITE FAMILY



A remote control project involving hundreds of identical RTU ? You look for an affordable and powerful - but no modular device – telemetry solution for volume projects ? TBOX-LITE is made for you !

All the power of advanced TBOX concept in a tiny yet ruggedized enclosure. For quantity applications requiring fixed number of inputs/outputs and specific communication ports, Techno Trade offers the « TBOX-LITE ». Of compact size and monoblock, TBOX LITE fixes easily on DIN RAIL.


TBOX-LITE offers all the power of the well-known TBOX concept : advanced telemetry, complete Automation and Internet compatibility. Non modular, TBOX LITE exists in different models. If your project justify quantities, we can develop rapidly your own TBOX-LITE according to your needs, your specification and even your own layout.

Technical specifications may change without prior notice

**TBOX**  
Remote Controlled Intelligence

# LT-201-GE

Specifications for LT-201-GE	
Processor	16-Bit $\mu$ P at 7.37 Mhz
Communication ports	COM1 : embedded GSM/GPRS (SMA connector) COM2: RS232 2 wires (Rx/Tx) COM3: RS485 Port, 2 wires, up to 115 KBaud COM4: Ethernet 10/100BaseT - RJ45
Memory	SRAM : 128KB battery backedup – Flash: 768 Kbytes+ 20 Kb internal RAM in $\mu$ P Multimediacard card support (option): up to 32 Mb
Real Time Clock	Real Time Clock backedup
Switch	Switch Reset/Stop/Run
Power Supply	Power supply 20..30VDC not isolated with internal battery charger
Inputs-Outputs	2 counter inputs 8 digital inputs or outputs - no isolation/no protection 2 analog inputs 0/2mA, 10 bits not isolated, passives, no protection 6 temperature inputs (Pt1000) 4 relays outputs (230Vac 3A)
Terminal blocks	Spring loaded terminal blocks (supplied with the unit)
LEDs	LED for COM1, Ethernet, power and RUN. No LED's for digital I/O
GSM Network	Triband : 900/1800/1900 MHz
GPRS support	SMG 31bis, Multi slot class 10, class B terminal, PBCCH support
Protection	Protection of I/O according to IEC-61131 norm
Compatibility	All systems
SMS Function	Short Message Service MT/MO/CB/PDU - Emmit / Receive
User protection	By password / SIM card/ TBOX
Error Correction	Radio Link Protocol
External housing	Aluminium - Anodized
Fixing	Fixing spring
Dimensions	152mm x 85mm x 29mm
Working T°	0°C... +50°C
Humidity	Humidity : 0 to 95% non-condensed
Weight	600 g

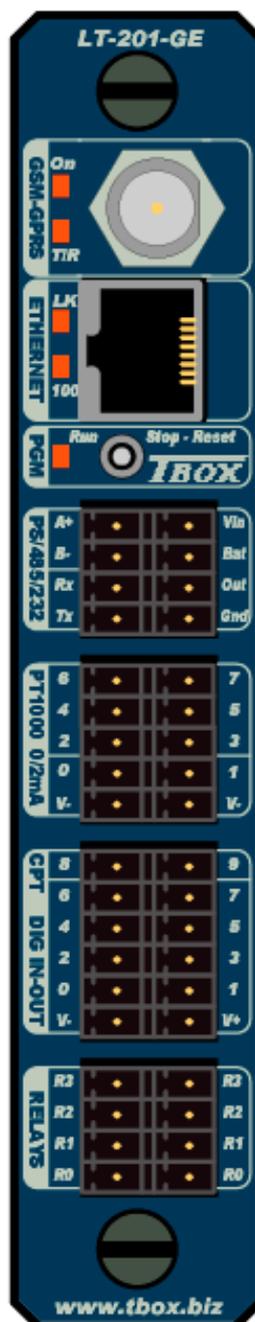

Technical specifications may change without prior notice